

RiPac

/Hostelería
/ Tiendas
/ Mini Markets

Terminal Mini TPV

Terminal TPV Compacto Todo-En-Uno



Intel



Multi-OS
Support



P-Cap
Touch



Thermal
Printer



Speaker



NFC



RFID



2nd
display

RiPac

Mini TPV



- Pantalla 10.1 16:9 con táctil PCT
- Impresora térmica de 80mm incorporada
- Sistema lector NFC Contactless
- Pantalla de clientes de 5"
- 4 Puertos USB
- Puerto RJ11 para Cajón
- 2 Puertos Serie Alimentados



Impresora
Térmica Incluida



Monitor de Cliente



Varios Puertos
de Entrada y Salida

Todo-En-Uno

- Impresora Térmica 80mm con autocorte y sistema de cambio de papel muy fácil
- Lector NFC Contactless interno compatible con RFID y Felica

CPU de Alto Rendimiento

- Plataforma única para varios SO
- Baja Temperatura y Alta estabilidad
- Amplio set de puertos I/O

Diseñado Pensando en el Cliente

- Pantalla Full flat 10,1" LCD Táctil
- Display 5" para cliente incorporado con ajuste de ángulo de visión
- Diseño Super Compacto 299 x 316,2 x 148,9

RiPac Mini TPV

Comedores



AT Cliente



Diseño estilizado




Monitor lado clientes

- Monitor 5" para clientes
- Angulo de visión ajustable



Set de conexiones variado

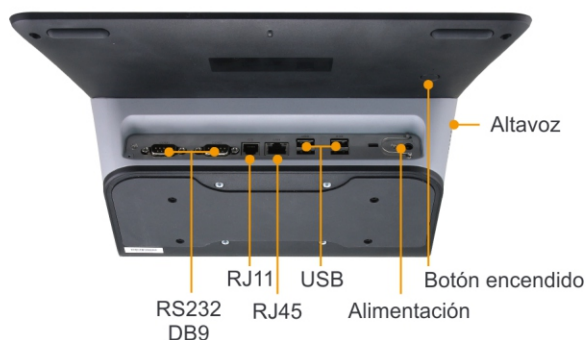

Impresora integrada

- Impresora Térmica 80mm con autocorte
- Cambio de papel fácil e intuitivo
- Acceso facil al módulo de impresión para servicio



Especificaciones Técnicas

Model Name	RIPAC-10P1	
Component		
CPU	Intel® Atom™ Z3735F 1.33GHz Processor	
Memory	2GB DDR3L SDRAM	
Wireless LAN	Built-in IEEE 802.11 b/g/n	
Bluetooth	Built-in Bluetooth 4.0 + Class 1	
Operating System	Windows 8.1 / 10, Linux, Android 4.44	
Storage		
Solid State Drive	32G (Default)/64G (Optional) eMMC	
Panel		
LCD Panel	10.1" LCD, 5" LCD (customer facing)	
Resolution	1280 x 800 (10.1"), 1280 x 720 (5")	
Touch Screen	Projected Capacitive Touch	
	Main Display (10.1")	Secondary Display (5")
LED Lifetime	26,230Hours	29,882 Hours
Contrast	800	1000
Viewing Angle	85(L)/ 85(R)/ 85(T)/ 85(B)	80(L)/ 80(R)/ 80(T)/ 80(B)
External I/O		
Serial Port	2 x RS-232 in DB9, Powered with 5/12V	
USB Port	4 x USB2.0	
LAN Port	1 x RJ45 (10/100)	
Cash Drawer	1 x RJ11 (12/24V)	
NFC	ISO/IEC 14443 A/B, 15693/18092	
Thermal Printer		
Printing Method	Thermal Dot Line Printing	
Total Dots Per Line	576 Dots	
Resolution	(W) 8 Dots/mm, (H) 8 Dots/mm	
Maximum Print Speed	200mm/s	
Maximum Print Width	72mm	
Maximum Paper Width	80mm	
Type of Paper Cutting	Full Cut & Partial Cut	
Mechanical		
Power Type	19.5V/6.15A 120W Lockable Adapter	
Power Connector Type	Lockable DC-Jack	
Dimension	299.05 x 273.18 x 128.81 (H)mm	
Weight	3KG±10%	
Color	Black & Gray	
Fanless	Yes	
Reliability		
Certifications	CE/FCC	
Vibration Test	1.5 Grms, IEC 60068-2-64, Random, 5~500HZ, 30min/axis	
Shock Test	10 Grms, IEC 60068-2-27, Half sine, 11ms	
Operating Temperature	5°C~40°C	
Operating Humidity	0~95% non-condensing	
Storage Temperature	-10°C~60°C	

DISTRIBUIDOR